

3<sup>rd</sup> World Congress on


## PETROLEUM ENGINEERING AND NATURAL GAS RECOVERY

July 20-21, 2018 Sydney, Australia

## Experimental and theoretical evaluation of solid particle erosion in an internal flow passage within a drilling bit

Jian Zhao<sup>1</sup>, Yiji Xu<sup>1</sup> and Daoyong Yang<sup>2</sup><sup>1</sup>China University of Petroleum, China<sup>2</sup>University of Regina, Canada

Recently, the Particle Impact Drilling (PID) technology has attracted numerous interests as it can increase the Rate of Penetration (ROP) efficiently. Particles that are accelerated in the nozzles within the drilling bit impact the hard rock with a high velocity and frequency, which can increase the rock breaking efficiency greatly. So far, no attempts have been made to evaluate solid particle erosion and optimize the drilling bit structure together with operational parameters since the steel particles can increase the erosion of its internal flow passage resulted from the liquid-solid flow with a high velocity. In this study, a pragmatic and robust technique has been developed to experimentally and numerically evaluate solid particle erosion in an internal flow passage within a drilling bit under various conditions. Experimentally, a field-scaled Three-Dimensional (3D) experimental setup is developed to perform erosion experiments under various conditions, during which operating pressure, particle size and velocity are changed, while the erosion rate of the internal flow passage within the drilling bit is continuously monitored and measured. Numerically, a two-way coupled Eulerian-Lagrangian approach is employed to solve the liquid-solid flow in the internal flow passage. The liquid is described as a continuous phase that can be solved by the Navier-Stokes equations and the particles are described as a discrete phase that can be solved by the second law of Newton. A commonly used erosion model is utilized to quantify solid particle erosion behaviour in such an internal flow passage during two phase liquid-solid flow. The erosion is found to be mainly distributed on the contraction surface, while, at the inlet velocity greater than 8.0 m/s, the average erosion rate is dramatically increased. The maximum erosion rate is increased quickly as the particle concentration is smaller than 5.0 vol.% and the inlet angle is increased when it is smaller than 23°. At a low erosion rate, the optimal particle diameter was found to be 2.0 mm.

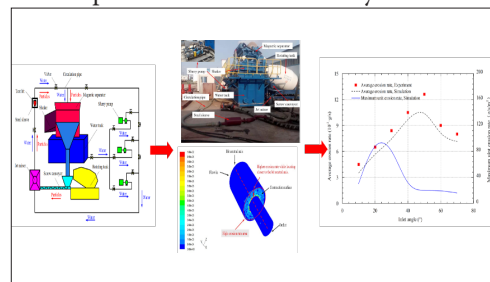

## References

1. Hardisty T (2007) Big oil is tuning into hard rock to get to petroleum resources. *Houston Business Journal*; 37: 16-22.
2. Tibbitts G A and Galloway G G (2008) Particle drilling alters standard rock-cutting approach. *World Oil*; 229: 37-44.

## Biography

Jian Zhao is a Lecturer in Drilling Engineering at the China University of Petroleum. His research interests include high pressure water jet penetration, particle impact drilling, solid mechanics and liquid-solid flow. He has completed a BSc degree in Petroleum Engineering, MA Science degree and a PhD degree in Drilling Engineering, all from the China University of Petroleum.

zhaojian-666@163.com, zhaojian@upc.edu.cn

## Notes: